

Express Mail No. EL651891435

FORM PTO-1390  
(REV 10-95)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

15675P369

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/FR00/00413

February 18, 2000

09/913971  
February 19, 1999

TITLE OF INVENTION

**CONTROLLED RUPTURE DEVICE FOR A STRUCTURE OPERATING IN TRACTION AND**

APPLICANT(S) FOR DO/EO/US

Guy Valembois; Pascal Gendre; Regis Riffet

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b)) and PCT articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

**Items 11. to 16. below concern document(s) or information included:**

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.  
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A subsequent specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:

priority request; copy of preliminary examination report w/amended pages; copy of request of filing; copy of forms pct/ib/301 & 304, English translation of amended pages, English translation of prelim. exam report; formal drawings transmittal; 5 drawings sheets; copy of complete application with amended pages (31 pages)

## Annex US.II, page 2 PCT Applicant's Guide - Volume II - National Chapter - US

U.S. APPLICATION NO. <b>09/913971</b>		INTERNATIONAL APPLICATION NO. <b>PCT/FR00/00413</b>		ATTORNEY'S DOCKET NUMBER <b>15675P369</b>	
---------------------------------------	--	--	--	--	--

<b>17. <input checked="" type="checkbox"/> The following fees are submitted:</b> <b>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5) ):</b> Neither international preliminary examination fee (37 CFR 1.482 nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by EPO or JPO ..... <b>\$1000.00</b> International preliminary examination fee (37CFR1.482)not paid to USPTO but International Search Report prepared by the EPO or JPO. ... <b>\$860.00</b> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee paid to USPTO (37 CFR 1.445(a)(2)) ..... <b>\$700.00</b> International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) .... <b>\$690.00</b> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100.00</b>				<b>CALCULATIONS FOR PTO USE ONLY</b>	
<b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>\$ 860.00</b>	
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				<b>\$</b>	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	50 - 20 =	30	<input checked="" type="checkbox"/> \$18.00	\$	540.00
Independent claims	1 - 3 =	0	<input checked="" type="checkbox"/> \$78.00	\$	0.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable) + \$270.00				\$	270.00
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$	1670.00
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).				\$	
<b>SUBTOTAL =</b>				\$	1670.00
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
<b>TOTAL NATIONAL FEE =</b>				\$	1670.00
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00</b> per property				\$	
<b>TOTAL FEES ENCLOSED =</b>				\$	1670.00
				\$	Amount to be: refunded
				\$	charged

a. ☒ A check in the amount of \$ 1670.00 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees.  
 A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any  
 overpayment to Deposit Account No. 022666. A duplicate copy of this sheet is enclosed.

**NOTE:** Where an appropriate time limit under 37 CFR 1.495 has not been met, a petition to revive (37 CFR  
 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Blakely, Sokoloff, Taylor & Zafman LLP  
 12400 Wilshire Blvd. 7th Floor  
 Los Angeles, CA 90025-1026

SIGNATURE  
 Eric S. Hyman  
 NAME  
 30,139  
 REGISTRATION NUMBER

09/913971

JCO5 Rec'd PCT/PTO 1 7 AUG 2001

Atty. Docket No.: 15675.P369  
Express Mail #: EL651891435US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the application of: )

Guy Valembois, Pascal Gendre and Regis Riffet )

For: CONTROLLED RUPTURE DEVICE FOR A )  
STRUCTURE OPERATING IN TRACTION AND )  
EQUIPMENT USING SAME )

PRELIMINARY AMENDMENT

Hon. Commissioner of  
Patents and Trademarks  
Washington, D.C. 20231

Dear Sir:

Prior to the examination of the above-identified application, Applicant requests entry of the  
following amendment:

IN THE SPECIFICATION

Please replace the specification beginning on page 2, line 10 and ending on page 3, line 19 with  
the attached replacement pages:

REMARKS

Entry of the foregoing amendments is requested.

Respectfully submitted,

BLAKELY SOKOLOFF, TAYLOR & ZAFMAN

Dated: 8/17/01

By: 

Eric S. Hymn, Reg. No. 30,139

12400 Wilshire Boulevard  
Seventh Floor  
Los Angeles, California 90025  
(310) 207-3800

09/913971

601700177

17 AUG 2001

10 However, hitherto, the devices of this type have still  
not been satisfactory either. They also lead to not  
insignificant shocks and to risks of pollution  
following the escape of the gases originating from the  
pyrotechnic generator.

15 Solutions based on expanding pyrotechnic tubes filled  
with explosive and placed against the structure to be  
ruptured, near to a line of weakness formed therein,  
have also been proposed.

20 On this point, reference may be made for example to  
document FR-A-2 619 738.

25 This solution is not entirely satisfactory either. This  
is because it actually leads to a shock level which is  
too high for certain applications.

Document DE-19604410 describes a device comprising a  
structure placed in tension between two support  
30 elements, and a rupture device associated with this  
structure in tension so as to rupture the latter on  
demand.

35 In an attempt to improve the situation, present-day  
studies are tending toward the use of a damper coupled  
to the cutting device in order to limit the level of  
mechanical stress applied to the equipment that is to  
be released.

It is an object of the present invention to propose a new device designed to allow the rupture of a structure forming a tie operating in tension and holding a system, which device is designed to limit the mechanical stress applied to the system at the time of the rupture of the tie, particularly to limit the vibration transmitted to the system.

Another auxiliary object of the present invention is to propose a rupture device of a structure avoiding any pollution of the environment.

These objects are achieved in the context of the present invention by virtue of a device as defined in the appended claim 1.

As a preference, this device for the controlled rupture of fibers, particularly pretensioned fibers, is characterized in that it comprises two stressing members arranged one on each side of the fibers, and operating means designed to, on demand, bring about a relative displacement toward each other of the stressing members, the latter being shaped so that, as they move closer together, they impose on the fibers a radius of curvature that is below the threshold of curvature thereof that leads to rupture in bending.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of:

GUY VALEMOIS, ET AL.

Application No.:

Filed:

For: **CONTROLLED RUPTURE DEVICE  
FOR A STRUCTURE OPERATING IN  
TRACTION AND EQUIPMENT USING  
SAME**

Art Group:

Examiner:

Assistant Commissioner for Patents  
Washington, D.C. 20231

**TRANSMITTAL OF FORMAL DRAWINGS**


Sir:

Enclosed herewith for filing in the above-identified U.S. Patent Application are the formal drawings, 5 sheets including 16 Figures. Applicant hereby authorizes any additional extension or petition fees under 37 C.F.R. §1.17 or credit for any overpayment to our Deposit Account No. 02-2666. A copy of the Fee Transmittal sheet is enclosed.

Respectfully submitted,

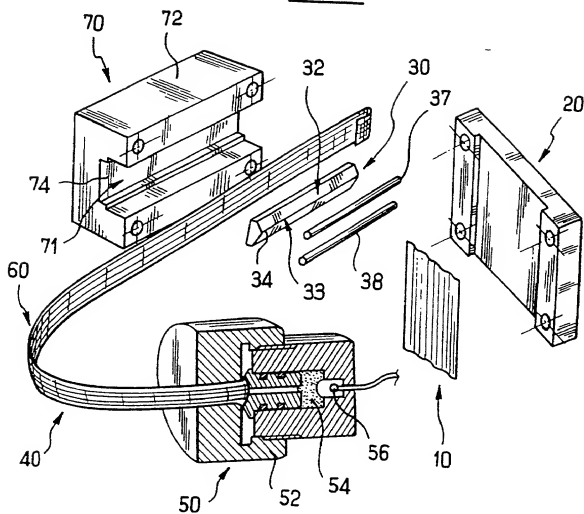

BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN

Dated: 8/17/01

  
Eric S. Hyman, Reg. No. 30,139

12400 Wilshire Blvd., 7th Floor  
Los Angeles, California 90025  
Telephone: (310) 207-3800

1 / 5

FIG. 1FIG. 2

2 / 5

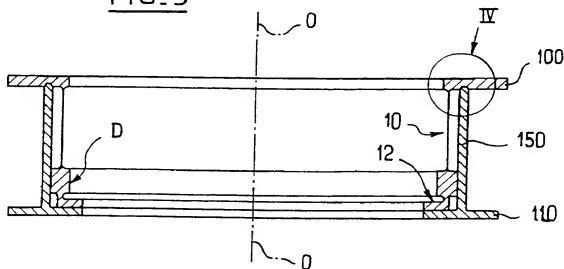



FIG. 3FIG. 4FIG. 5FIG. 6



FIG. 7




FIG. 8




FIG. 9




FIG. 10

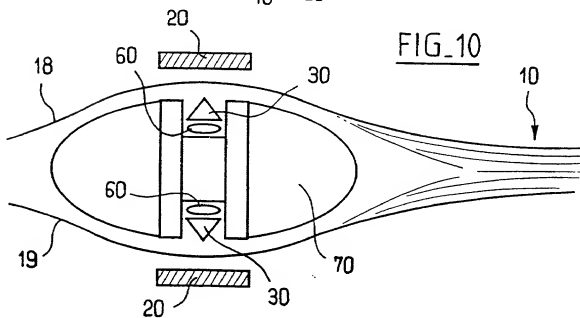


FIG. 11

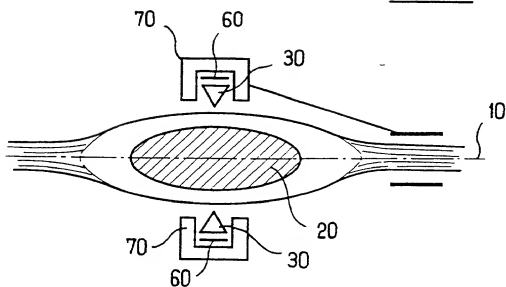


FIG. 12

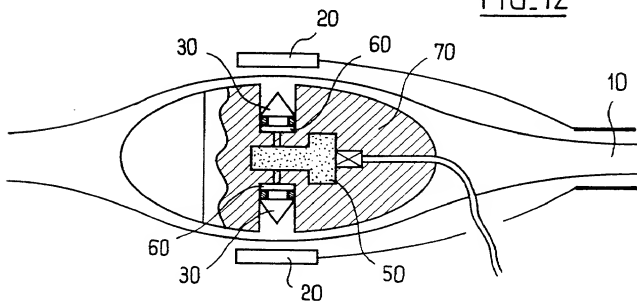


FIG. 13

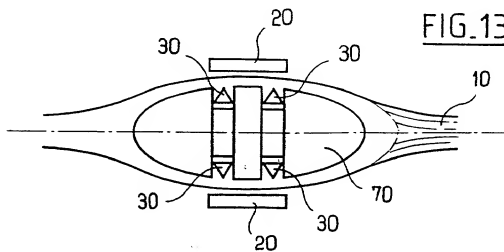
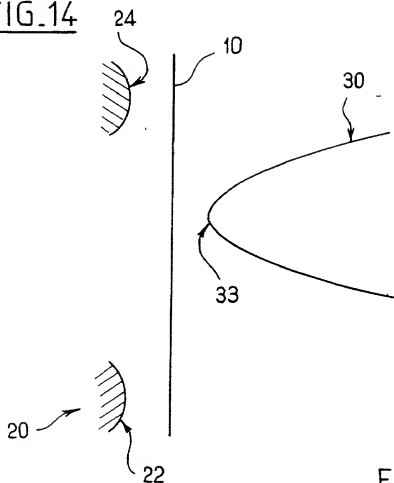

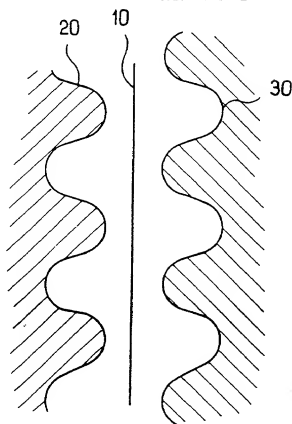


FIG.14FIG.15FIG.16

5/8/79

**CONTROLLED-RUPTURE DEVICE FOR A STRUCTURE OPERATING IN TENSION AND EQUIPMENT USING THE SAME**

5 The present invention relates to the field of controlled-rupture devices for structures, particularly structures operating in tension.

10 The present invention may, in particular, find an application in the controlled rupture of ties or supports for holding systems, when these need to be released.

15 More specifically still, the present invention preferably applies to the field of assemblies comprising systems which are highly sensitive to mechanical stress. Thus, the present invention may in particular find an application in the field of aerospace, for example as a support designed to perform the controlled release of small-sized satellites.

20 Numerous devices for cutting ties, cables or the like have already been proposed.

25 In particular, numerous rupture devices based on detonating cords have already been proposed.

30 On this point, reference may be made, for example, to documents FR-A-2 495 991, FR-A-2 492 336, FR-A-2 364 746, FR-A-2 464 778 and EP-A-55165.

These known devices are still not satisfactory, however. In particular, they generate not insignificant shocks in the structures cut and their environment. Furthermore, they lead to pollution which is unacceptable in certain applications.

Numerous cutting devices comprising a cutter and an element such as a pyrotechnic generator designed to move the cutter against the structure to be ruptured in

WO 00/48778

PCT/FR00/00413

CONTROLLED-RUPTURE DEVICE FOR A STRUCTURE OPERATING IN  
TENSION AND EQUIPMENT USING THE SAME

5 The present invention relates to the field of  
controlled-rupture devices for structures, particularly  
structures operating in tension.

10 The present invention may, in particular, find an  
application in the controlled rupture of ties or  
supports for holding systems, when these need to be  
released.

15 More specifically still, the present invention  
preferably applies to the field of assemblies  
comprising systems which are highly sensitive to  
mechanical stress. Thus, the present invention may in  
particular find an application in the field of  
aerospace, for example as a support designed to perform  
the controlled release of small-sized satellites.

20 Numerous devices for cutting ties, cables or the like  
have already been proposed.

25 In particular, numerous rupture devices based on  
detonating cords have already been proposed.

30 On this point, reference may be made, for example, to  
documents FR-A-2 495 991, FR-A-2 492 336,  
FR-A-2 364 746, FR-A-2 464 778 and EP-A-55165.

35 These known devices are still not satisfactory,  
however. In particular, they generate not insignificant  
shocks in the structures cut and their environment.  
Furthermore, they lead to pollution which is  
unacceptable in certain applications.

Numerous cutting devices comprising a cutter and an  
element such as a pyrotechnic generator designed to  
move the cutter against the structure to be ruptured in

ARTICLE 24

14-05-2001

- 2 -

09/91397T  
JC05 Rec'd PCT/PTO 17 AUG 2001  
FR 000000413

5

10 However, hitherto, the devices of this type have still not been satisfactory either. They also lead to not insignificant shocks and to risks of pollution following the escape of the gases originating from the pyrotechnic generator.

15

Solutions based on expanding pyrotechnic tubes filled with explosive and placed against the structure to be ruptured, near to a line of weakness formed therein, have also been proposed.

20

On this point, reference may be made for example to document FR-A-2 619 738.

25

This solution is not entirely satisfactory either. This is because it actually leads to a shock level which is too high for certain applications.

30

Document DE-19604410 describes a device comprising a structure placed in tension between two support elements, and a rupture device associated with this structure in tension so as to rupture the latter on demand.

35

In an attempt to improve the situation, present-day studies are tending toward the use of a damper coupled to the cutting device in order to limit the level of mechanical stress applied to the equipment that is to be released.

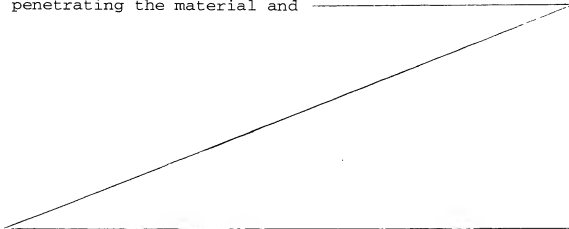
It is an object of the present invention to propose a new device designed to allow the rupture of a structure forming a tie operating in tension and holding a system, which device is designed to limit the mechanical stress applied to the system at the time of the rupture of the tie, particularly to limit the vibration transmitted to the system.

Another auxiliary object of the present invention is to propose a rupture device of a structure avoiding any pollution of the environment.

These objects are achieved in the context of the present invention by virtue of a device as defined in the appended claim 1.

As a preference, this device for the controlled rupture of fibers, particularly pretensioned fibers, is characterized in that it comprises two stressing members arranged one on each side of the fibers, and operating means designed to, on demand, bring about a relative displacement toward each other of the stressing members, the latter being shaped so that, as they move closer together, they impose on the fibers a radius of curvature that is below the threshold of curvature thereof that leads to rupture in bending.

The applicant company has determined that this device, which works by bending the fibers rather than by penetrating the material and



stationary, while the other can move under the actuation of the operating means.

According to an advantageous feature of the present invention, the operating means comprise a pyrotechnic charge capable of generating a high-pressure gas and an inflatable sealed member connected to the pyrotechnic charge and in contact with at least one of the stressing members so as to bring about a displacement of this when said charge is initiated.

According to another advantageous feature of the present invention, the structure to be ruptured, formed on the basis of fibers, may at least in part be agglomerated with a synthetic material so as to form a composite material. As a preference, the structure to be ruptured consists of a strap or the like.

The present invention also relates to an equipment item employing such a rupture device. As indicated above, such an equipment item may, for example, be configured to act as a temporary support for microsatellites on board a rocket, so as to release these at a determined and controlled point on the rocket trajectory.

According to the present invention, an equipment item such as this comprises a structure placed in tension between two support elements, a rupture device free of mechanical shock associated with this structure in tension so as to rupture the latter on demand, and a beam working in compression, inserted between these two support elements in parallel with the structure to be ruptured. In such an equipment item, the beam makes it possible to maintain the relative position of the support elements, in combination with the structure in tension. Further, all that is required is for this structure in tension to be ruptured in order to eliminate the link there is between the two support elements and thus release at least one of these



together with the systems, such as satellites, linked to it.

5 An equipment item such as this may in particular find an application in the support of (a) microsatellite(s) on a launcher. However, it is not restricted to this particular application.

10 Other features, objects and advantages of the present invention will become apparent upon reading the detailed description which will follow and from studying the appended drawings, given by way of non-limiting examples, and in which:

15 - Figure 1 depicts a diagrammatic view in exploded perspective of the basic means that make up a rupture device according to the present invention,

20 - Figure 2 depicts a view in cross section of the same means,

- Figure 3 depicts a view in section of controlled-rupture support equipment comprising a means that can withstand compression,

25 - Figure 4 depicts a detail view of such an equipment item, for the region referenced IV in figure 3, and

30 - Figures 5 to 16 illustrate alternative forms of embodiment of the rupture device according to the present invention.

The appended figures 1 and 2 show the basic structure of a device according to the present invention, designed for the controlled rupture of a structure  
35 formed of a tape 10.

This tape 10 may itself be embodied in numerous ways.

In the context of the present invention, the structure 10 to be ruptured is preferably formed on the basis of fibers, such as carbon fibers, glass fibers, aramid fibers for example, or alternatively any other type of fiber, used in particular in the textile field and capable of withstanding high tensile forces compatible with the intended applications.

If appropriate, these fibers may be agglomerated in a synthetic material, for example rigidly polymerized, to form a structure to be ruptured 10 made of composite material.

Furthermore, as appropriate, in the context of the present invention, the structure to be ruptured 10 may be nonhomogeneous over its entire length. In particular, it is possible to envisage a structure 10 to be ruptured formed of composite material, that is to say based on fibers embedded in a synthetic material, except in its rupture zone placed facing the stressing means where it consists exclusively of fibers or essentially of fibers and of a small amount of synthetic material.

In the context of the present invention, the fibers are oriented essentially longitudinally, that is to say parallel to the direction of the tension exerted on the structure to be ruptured. This may be a unidirectional fiber structure. However, in an alternative form, fibers oriented transversely may be envisaged.

The structures to be ruptured may be formed of a woven or of a nonwoven.

As a preference, in the context of the present invention, the structures 10 to be ruptured have a longitudinal elastic modulus in excess of 20 000 MPa.

Furthermore, according to a nonlimiting feature of the invention, the fibers used preferably have an individual diameter of between 0.1 and 25  $\mu\text{m}$ , or even between 0.1 and 10  $\mu\text{m}$ .

5

According to the preferred embodiment of the invention, the aforementioned stressing members are formed of retaining means 20, such as an anvil, and of a punch 30.

10

Further, these stressing means are associated with means 40 designed to bring about a relative displacement, on demand, between the retaining means 20 and the punch 30. The means 40 are preferably of pyrotechnic type.

15

As mentioned earlier, the stressing members such as the punch 30 and the retaining means 20 are arranged one on each side of the fibers 10.

20

As also mentioned earlier, the stressing members, such as the punch 30 and the retaining means 20, are shaped so that, as they move closer together, they impose on the fibers 10 a radius of curvature that is below the threshold of curvature thereof that leads to rupture in bending.

25

The punch 30 is preferably formed of a hard material, for example high-carbon steel such as 100C6, with a modulus  $\sigma_e$  higher than 2 000 MPa. The punch may be configured in many ways.

30

As a preference, it essentially comprises, on one side, a dihedron formed of two flat faces 32, 34 which meet at a somewhat rounded edge 33 directed toward the structure 10 to be ruptured and, on the other side, a flat face 36 perpendicular to the plane of symmetry of the dihedron and designed to be stressed by the means 40. The edge 33 extends at right angles to the

35

longitudinal direction of the fibers. The flat face 36 extends parallel to the longitudinal direction thereof.

- 5 In the context of the present invention, the dihedron formed by the faces 32, 34 preferably defines an angle of between 30 and 90°, very preferably of the order of 60°.

- 10 The radius of curvature of the rounded edge 33 is preferably smaller than the minimum radius that the fibers 10 can tolerate before they rupture in bending.

- 15 In the context of the present invention, the means 40 for bringing about the displacement of the punch 30 are advantageously formed by the combination of a high-pressure gas pyrotechnic generator 50 and of an inflatable sealed element 60.

- 20 The pyrotechnic generator 50 is placed in a rigid casing 52, preferably remote from the punch 30. The rigid casing 52 may itself be formed by assembling several components.

- 25 The separation between the pyrotechnic generator casing 52 and the punch 30 is intended to mechanically decouple the pyrotechnic generator 50 and the punch 30 so as to avoid the transmission of detrimental mechanical stresses, particularly vibration, between the casing 52 and the punch 30.

- 30 By way of nonlimiting example, it is possible to envisage a separation of the order of 100 mm, minimum, between the pyrotechnic generator 50 and the punch 30.

- 35 The structure of the pyrotechnic generator 50 is known per se. The casing 52 defines an internal chamber 54 accommodating a powder charge in conjunction with an initiator 56.

The initiator 56 is preferably of electrical type. However, as appropriate, it is possible to envisage a percussive initiator because of the mechanical decoupling defined between the casing 52 and the punch 30.

It is important that, in the context of the present invention, the powder 54 be designed to generate a gas by combustion and not at all by a deflagration or detonation effect.

The inflatable sealed element 60 is preferably formed of an elongate tube, packaged at rest in the flattened state. Thus, at rest, the flat two main faces of the flattened tube 60 run parallel to the rear attack face 36 of the punch 30 as can be seen in figure 2. One of the flat main faces of the flattened tube 60 incidentally rests on this flat attack face 36. The other face of the tube 60 rests on a stationary bearing face 71.

More specifically still, in the context of the present invention, the inflatable sealed element 40 is preferably formed of a stainless steel tube.

The sealed connection between the tube 60 and the pyrotechnic gas generator 50 may be achieved by any appropriate means, for example by crimping.

The opposite end of the tube may be plugged by any appropriate means.

By way of nonlimiting example, the inflatable sealed tube 60 may have a diameter of the order of 4 mm and a wall thickness of the order of 0.2 to 0.3 mm.

Those skilled in the art will readily understand that, when the generator 50 develops a pressurized gas inside the tube 60, the tube changes from its flattened rest

state to an inflated state of approximately circular cross section.

Thus, the deformation of the inflatable tube 60 bearing  
5 against the surface 71 causes the punch 30 to move against the structure to be ruptured 10, so that the latter is sandwiched between the two stressing members such as the punch 30 and the anvil 20.

10 As already stated, in the context of the present invention, the punch 30 is preferably designed to rupture the element to be ruptured 10, not at all by penetrating the material of which this structure to be ruptured 10 is made and therefore by gradually reducing  
15 the thickness thereof, but by local deformation of the fibers of which the structure to be ruptured is made, in bending beyond their ability to deform.

To do that, the anvil 20 is preferably formed of a material not as hard as the punch 30, so as to tolerate  
20 at least a slight penetration of the structure to be ruptured 10 and possibly of the punch 30, under the effect of the stress thereon, so as to bring about the aforementioned bending.

25 By way of nonlimiting example, the anvil 20 may be formed of a medium-carbon steel. However, many other materials may be envisaged, including, for example, materials based on elastomer or materials exhibiting  
30 plastic behavior, such as aluminum, copper, lead, etc.

By way of nonlimiting example, the anvil 20 may be made of a material having an ultimate tensile strength  $\sigma_e$  of below 600 MPa.

35 As appropriate, the anvil 20 may also have, facing the edge 33 of the punch 30, a groove or hollow making it easier to bend the tape, when the latter rests on the margins of said groove or hollow, while the

intermediate segment of the structure to be ruptured 10 enters said groove or hollow under the effect of the punch.

- 5 If appropriate, the retaining means 20 may incidentally be formed simply of two supports 22, 24 situated on the opposite side of the fibers 10 to the punch 30, as can be seen in figure 14, the two supports 22, 24 being arranged one on each side of the edge 33 of the punch  
10 30 in the longitudinal direction of the fibers 10.

- According to another advantageous feature of the present invention, the distance separating the two supports 22, 24 is between one times the diameter or  
15 thickness of the fibers 10 and the amplitude of relative displacement of the stressing means 20, 30, preferably between two times the diameter or thickness of the fibers 10 and the amplitude of relative displacement of the stressing means 20, 30.

- 20 Figure 15 illustrates an alternative form of embodiment whereby the stressing members comprise a recessed punch 30, placed facing an anvil 20 which is not as hard, for example based on elastomer.

- 25 Figure 16 illustrates another alternative form of embodiment whereby the two stressing members are formed of comb-shaped members placed facing each other and offset from one another by half a pitch in the  
30 longitudinal direction of the fibers.

- When the fibers 10 are stressed in bending by the stressing members 20 and 30, the part of the fibers that lies on the inside of the curvature experiences  
35 compressive stress. Conversely, the part of the fibers situated on the outside of the curvature experiences a tensile stress  $\sigma_1$  due to bending, to which is possibly added a tensile force  $\sigma_2$  applied to the fibers independently of any bending.

The maximum permissible stress that the fibers 10 can withstand before they rupture can be determined by the relationship:

$$\sigma = [(d/2)E]/r$$

terming:

- .  $\sigma$  represents the maximum local tensile or compressive stress ( $\sigma = \sigma_1 + \sigma_2$ ),
- . E the longitudinal elastic modulus,
- . r the mean radius of curvature, and
- . d the diameter or thickness of the beam consisting of a fiber 10.

- 15 The applicant company has moreover determined that the above formula led to the following radii of curvature r upon rupture for a fiber having a diameter d of 10  $\mu\text{m}$ :

	E (in GPa)	$\sigma$ (in MPa)	r (in mm)
High-modulus carbon	3 600	2 400	0.75
High-strength carbon	260	3 200	0.4
R-glass	85	3 200	0.13
E-glass	74	2 450	0.15
Kevlar 49	132	3 000	0.22
Kevlar 29	82	3 000	0.13
Steel (35 NCD 16)	220	1 600	0.68

- 20 Thus, the applicant company determined that the maximum radius of the edge 33 of the punch 30 is preferably of the order of 1 mm, preferably at maximum of the order of 0.75 mm.

- 25 As a preference, in the context of the present invention, means designed to initially keep the punch 30 away from the structure 10 to be ruptured as long as the generator 50 is not initiated are also preferably provided.



Such temporary keeping means may be formed of numerous appropriate structures.

- In the context of the present invention, such temporary
- 5 keeping means may be formed of two strips of elastic material, for example of silicone elastomer 37, 38, arranged respectively between the structure to be ruptured 10 and one of the flanks 32, 34 of the punch.
- 10 By way of nonlimiting example, these may be two silicone elastomer strips with a diameter of the order of 2.5 mm.
- In the context of the present invention, such temporary
- 15 keeping means may be designed, for example, to keep the edge 33 of the punch 30 a distance of the order of 0.5 mm away from the structure to be ruptured 10.
- In order to rupture the structure 10, the tube 60 has
- 20 to receive about 2.5 cm<sup>3</sup> of gas at 500 bar.
- Thus, the generator 50 is preferably designed to produce at least 1.25 l of gas at one atmosphere.
- 25 The applicant company obtained very satisfactory results during tests on the severing of an omnidirectional carbon-fiber strap of the order of 25 mm wide and of the order of 0.3 mm thick. These tests, performed with a rupture device of the type illustrated
- 30 in the aforementioned figures 1 and 2, actually led to a level of shocks on the structure to be ruptured 10 and on its environment of less than 40 g.
- The device further comprises means 70 designed to keep
- 35 the inflatable tape 60 in position and to guide the punch 30 between a retracted position away from the structure to be ruptured 10, as illustrated in figure 2, and a working position in which the edge 33 of the punch 30 stresses the structure to be ruptured

10 to bring about local bending thereof and cause it to rupture.

5 These means 70 supporting the tape 60 and guiding the punch 30 may be embodied in numerous alternative ways.

According to the embodiment illustrated in figures 1 and 2, such support means have thus been represented in the form of a block 72 having a stepped groove.

10

The structure of an equipment item employing such a rupture device will now be described with reference to the appended figures 3 and 4. As indicated earlier, such an equipment item may, for example, be configured to act as a temporary support or interface for micro-satellites on board a rocket or a launcher, so as to release these at a determined and controlled release point.

15

20

According to the present invention, such an equipment item comprises a structure 10 placed in tension between two support elements 100, 110, a rupture device 20, 30, 40, 50 free of mechanical shock associated with this structure in tension 10 so as to rupture the latter on demand, and a beam 150 working in compression, inserted between these two support elements 100, 110 in parallel with the structure to be ruptured 10. In such an equipment item, the beam 150 makes it possible to maintain the relative position of the support elements 100, 110, in combination with the structure in tension 10. Further, all that is required is for this structure in tension 10 to be ruptured in order to eliminate the link there is between the two support elements 100, 110, and thus to release at least one of these, together with the systems, such as satellites, linked to it.

25

30

35

The structure illustrated in the appended figures 3 and 4 is an annular structure centered about an axis O-O.

This structure comprises two mutually parallel washers 100, 110 taking the place of the aforementioned support elements, the mean plane of which is perpendicular to  
5 the axis O-O and which are centered on this axis.

The lower washer 10 can rest, for example, on a base, such as the chassis of a satellite launcher, while the upper washer 100 itself acts as a support bracket for  
10 these satellites, or for any other equivalent equipment that is to be released with precision at a controlled moment.

The two washers 100, 110 are joined together by a  
15 structure 10 working in tension. Furthermore, an element or beam 150 working in compression is inserted between these washers 100 and 110, in parallel with the structure in tension 10.

The structure to be ruptured 10 is associated with a  
20 shock-free rupture device schematically depicted in figure 3 and identified by the general reference D, according to the present invention, comprising stressing members 20, 30 arranged one on each side of  
25 the structure 10, for example in the form of a punch 30 associated with a pyrotechnic generator 50 and with an inflatable sealed member 60 as indicated earlier.

As indicated earlier, in this context, all that is  
30 required is for the structure 10 to be ruptured by implementing the stressing members 20, 30 in order to disconnect the washers 100, 110 and thus release the elements, such as microsattelites, carried by the washer 100.

35 In the context of this application, the structure to be ruptured 10 may be formed of a continuous annulus centered about the axis O-O (in which case, a set of punch segments 30 covering almost the entirety of the

interior surface of this structure to be ruptured 10 is provided) or of several elements distributed about the axis O-O (in which case a punch 30 covering the width of each structure to be ruptured 10, facing a  
5      respective one of these structures, is provided).

It will be noted that the element 10 to be ruptured working in tension and the element 150 working in compression preferably run parallel to the central axis  
10      O-O.

The structure to be ruptured 10 is secured, by one of its axis ends, to one of the washers, for example the washer 100, and is secured at its other end to a flange  
15      12 designed to be fixed by any appropriate means, for example by screwing, to the other washer, such as 110.

For its part, the element working in compression is formed of a wall or beam built into at least one of the washers 100, 110, such as the washer 100, so as to be able to be separated therefrom when the structure to be ruptured 10 is ruptured. According to the particular embodiment illustrated in figures 3 and 4, the element working in compression 150 is formed of an aluminum  
20      cylinder, the inner and outer faces of which are delimited by mutually parallel generators parallel to the axis O-O. The wall 150 is formed integrally with the lower washer 110 and built into the upper washer 100.  
25      100.

The geometry whereby the wall 150 working in compression is built into the upper washer 100 may be embodied in numerous alternative ways.  
30      100.

According to the nonlimiting embodiment given in the appended figures, the washer 100 has an annular groove 102 defined by a base surface 103 in the form of a ring perpendicular to the axis O-O and centered on the latter, defining the bottom of a groove, and two flanks  
35      102

104, 105 diverging from one another in the direction away from the base surface 103, and toward the outer surface of the washer 100. The two flanks 104, 105 are preferably symmetric with respect to a generator  
5 parallel to the axis O-O and are inclined with respect to this generator by an angle of between 10 and 60°.

The end of the wall 150 working in compression has a geometry that complements this groove 102.  
10

Of course, as an alternative, it is possible to provide a partition 150 working in compression and connected by any appropriate means to the base washer 110.

15 By way of nonlimiting example, the wall 150 working in compression may be made of aluminum, with a thickness of the order of 5 mm and a height (distance separating the two washers 100, 110) of the order of 80 mm, the inside diameter of the washers 100, 110 being of the  
20 order of 230 mm.

Figure 5 illustrates an alternative form of embodiment whereby the element 70 forming a guide for the inflatable tube 60 and the punch 30 is fixed to the  
25 washer 110, while the anvil 20 consists of the element 150 taking the place of the element resistant to compression. More specifically still, the anvil 20 is formed at an additional thickness of this element 150.

30 Like the embodiment of figures 3 and 4, the element 150 resistant to compression is arranged radially on the outside of the element 10.

One of the ends of the structure 10 to be ruptured is sandwiched between the part 70 acting as a guide and the washer 110. The other end of the structure to be  
35 ruptured 10 is fixed by any appropriate means to the second washer 100.

Figure 6 illustrates an alternative form of embodiment whereby the structure 10 to be ruptured is formed of a composite piece, equipped with additional thicknesses at each of its ends to form flanges 12, 14 intended for  
5 attachment to the washers 110, 100 or any equivalent means.

More specifically still, according to the embodiment illustrated in figure 6, the composite piece comprises,  
10 on the ends of the element to be ruptured 10 which typically is formed of a cylindrical skirt, respective flanges 12, 14 which on the whole are perpendicular to the axis of the cylindrical element 10 and face respectively, in the case of the flange 12, inward and,  
15 in the case of the flange 14, outward.

The alternative form thus described with reference to figure 6 is made up of a cylindrical element 10 and of two annular flanges 12, 14. According to another  
20 alternative form, it is possible to envisage an element to be ruptured 10 formed of a straight tape equipped, at each of its ends, formed integrally, with additional thicknesses 12, 14 similar to the means illustrated in figure 6.

25 The piece 70 acting as a guide for the inflatable tube 60 and for the punch 30 can be formed integrally on the flange 12 or attached and secured to the latter by any appropriate means.

30 Figure 7 illustrates another alternative form whereby the compression element 150 acts as a guide for the punch 30 and for the inflatable tube 60. In this case, there is an anvil 20 on the opposite side of the  
35 element 10 to be ruptured to the punch 30. This anvil 20 is fixed, by any appropriate means, to one of the flanges or washers 100, 110.

More specifically still, according to the embodiment illustrated in figure 7, the element 150 resistant to compression is equipped within its mass with a groove which guides the inflatable tube 60 and the punch 30.

5

By contrast, according to the alternative form illustrated in figure 8, the inflatable tube 60 and the punch 30 are placed in a guide 70 attached to the element 150 resistant to compression. Furthermore, here again, according to figure 8, there is an anvil 20 on the opposite side of the element to be ruptured 10 to the punch 30. It is furthermore possible to envisage for the anvil 20 to itself be secured to the guide 70.

10

15 Yet another alternative form, illustrated in figure 9, consists in placing the anvil 20, formed of an attached part, on the element 150 resistant to compression, and the guide 70 on the opposite side of the element to be ruptured 10 to the anvil.

20

In the various embodiments described above, with reference to figures 3 et seq., the element to be ruptured 10 runs in an overall direction parallel to the axis O-O of the annular structure. Further, the punch 30 is mounted to move in a direction generally transversal to this axis O-O.

25

Furthermore, it was indicated earlier that the element to be ruptured 10 could be formed either of a continuous annular structure centered about the axis O-O, or of discrete elements distributed about this axis O-O.

30

In this context, the element to be ruptured 10 may be formed, for example, of a tape. This may be unitary, that is to say formed of a single strand, for example of elongate rectilinear cross section, or alternatively circular or oblong, or may be split into various strands.

35

According to another alternative form, the element to be ruptured 10 may be formed of a tubular tape or equivalent, that is to say one having a loop-shaped cross section, for example in the form of a closed curve. In this case, it may, for example, be a flattened circular knit.

In the latter cases, it is possible to envisage placing at least one of the anvil elements or punch 30 in the space between the various strands making up the element to be ruptured or even in the interior space of the cross section of a tubular tape.

Figure 10 thus illustrates a support structure in the shape of an ogee 70 placed between two strands 18, 19 of an element 10 to be ruptured, and acting as a guide for the portions of inflatable tube 60 and for the punch segments 30 which are placed facing complementary anvils 20 so that the strands 18, 19 are sandwiched between said anvils 20 and the punch segments 30.

When such an ogee shape 70 is placed inside the cross section of a tape 10 which has a cross section in the form of a closed curve, it is of course necessary for the ogee shape 70 to support a number of portions of inflatable tube 60 and of punch 30 which together cover the entire periphery of the element to be ruptured 10.

According to the embodiment illustrated in figure 10, the various portions of inflatable tube 60 and punch segments 30 are located overall in a common plane orthogonal to the axis of the tape 10. As an alternative, however, particularly when the punch segments 30 have to cover the entire periphery of the ogee shape 70, it is possible to envisage staging these longitudinally along the ogee shape 70 to ensure an overlap between the ends of the various punch segments 30 and thus guarantee complete rupture of the tape 10.



Figure 11 illustrates a reverse arrangement, that is to say an anvil 20 formed of an ogee shape located at the center of the tape to be ruptured and structures 70 providing guidance of the inflatable tube 60 and of associated punch segments 30 arranged facing it, on the outside of the element to be ruptured 10.

In the context of figure 10, it is possible to envisage arranging the pressurized gas pyrotechnic generator on the outside of the ogee shape 70 and of the structure to be ruptured 10. However, as has been illustrated in figure 12, as an alternative, it is possible to envisage incorporating the pyrotechnic generator 50 into the ogee shape 70. In this case, use may be made of a pyrotechnic generator 50 common to the various punch segments 30 or alternatively of a pyrotechnic generator 50 associated with each respective punch 30.

Figure 13 illustrates another alternative form of embodiment whereby there are two punches 30 each associated with a respective pyrotechnic generator (not depicted in figure 13 in order to simplify the illustration) facing each of the zones to be severed of the element 10. Of course, a correspondingly designed facing anvil 20 is provided.

This arrangement illustrated in figure 13 allows a redundant effect and a guarantee of rupture of the structure in the event of deficiency of one of the pyrotechnic generators 50 or alternatively of the associated sealed inflatable tube 60 or even of the displacement of the punch 30.

The use of such a double structure of punch 30 can be applied to all the alternative forms of the present invention which have already been described.

More generally, in the context of the present invention, to guarantee operation of the rupture device, the entire operational sequence from the initiator 56 to the punch 30 can be duplicated in the form of two redundant rupture sequences placed in parallel, or at least certain sensitive elements of such an operational sequence may be duplicated.

Of course, the present invention is not restricted to the particular embodiments which have just been described, but extends to all alternative forms that are in accordance with its spirit.

According to the embodiments previously described, stationary retaining means 20 and a moving punch 30 are envisaged. However, as an alternative, it is possible to envisage the reverse, namely a stationary punch 30 and, facing it, retaining means 20 which can move under the effect of the pyrotechnic operating means 40, or alternatively a punch 30 and retaining means 20 associated with respective displacement means so that, upon actuation, each of the punch 30 and of the retaining means 20 is displaced toward the fibers 10. This arrangement applies in general to all of the stressing means irrespective of their embodiment.

CLAIMS

1. A device comprising a structure (10) placed in tension between two support elements (100, 110) and a rupture device (20, 30, 40, 50) associated with this structure in tension (10) so as to rupture the latter on demand, characterized in that it additionally comprises a beam (150) working in compression, inserted between these two support elements (100, 110) in parallel with the structure to be ruptured (10).
2. The device as claimed in claim 1, in which the structure (10) intended to be ruptured comprises pretensioned fibers, characterized in that it comprises two stressing members (20, 30) arranged one on each side of the fibers (10), and operating means (40) designed to, on demand, bring about a relative displacement toward each other of the stressing members (20, 30), the latter being shaped so that, as they move closer together, they impose on the fibers (10) a radius of curvature that is below the threshold of curvature thereof that leads to rupture in bending.
3. The device as claimed in claim 2, characterized in that the stressing members comprise a punch (30) and retaining means (20) arranged one on each side of the fibers (10).
4. The device as claimed in either of claims 2 and 3, characterized in that the operating means (40) are of pyrotechnic type.
5. The device as claimed in one of claims 2 to 4, characterized in that the operating means (40) comprise a pyrotechnic charge (50) capable of generating a high-pressure gas and an inflatable sealed member (60) connected to the pyrotechnic

charge (50) and in contact with at least one of the stressing members (20, 30) so as to bring about a relative displacement of these when said charge (50) is initiated.

5

6. The device as claimed in one of claims 2 to 5, characterized in that the structure to be ruptured (10) is made at least in part of composite material.

10

7. The device as claimed in one of claims 2 to 6, characterized in that the structure to be ruptured (10) consists of a strap.

- 15 8. The device as claimed in one of claims 2 to 7, characterized in that the structure to be ruptured (10) is formed on the basis of fibers chosen from the group containing carbon, glass and aramid.

- 20 9. The device as claimed in one of claims 2 to 8, characterized in that the element to be ruptured (10) is nonhomogeneous over its entire length: it consists essentially of fibers at the rupture zone placed facing the stressing members (30) and consists of a composite material, fibers embedded in a synthetic material, outside this rupture zone.

- 25 10. The device as claimed in one of claims 2 to 9, characterized in that the fibers that make up the structure to be ruptured (10) have a longitudinal elastic modulus in excess of 20 000 MPa.

- 30 11. The device as claimed in one of claims 2 to 10, characterized in that the fibers that make up the structure to be ruptured (10) have a diameter of the order of 0.1 to 25  $\mu\text{m}$ , or even of 0.1 to 10  $\mu\text{m}$ .

12. The device as claimed in one of claims 2 to 11, characterized in that one of the stressing members comprises a punch (30) made of high-carbon steel.
- 5 13. The device as claimed in one of claims 2 to 12, characterized in that one of the stressing members comprises a punch (30) which defines a dihedron, the angle of which is between 30 and 90°, preferably of the order of 60°.
- 10 14. The device as claimed in one of claims 3 and 12 to 13, characterized in that the punch (30) has an edge (33), the maximum radius of curvature  $r$  of which is defined by the relationship
- 15 
$$r = [(d/2)E]/\sigma$$
  
in which  
    .  $\sigma$  represents the maximum local extensile or compressive stress,  
    .  $E$  represents the longitudinal elastic modulus,  
20 and  
    .  $d$  represents the diameter or thickness of the beam consisting of a fiber (10).
- 25 15. The device as claimed in one of claims 3 and 12 to 14, characterized in that the punch (30) has an edge (33), the radius of curvature  $r$  of which is at maximum of the order of 1 mm, preferably at maximum of the order of 0.75 mm.
- 30 16. The device as claimed in one of claims 2 to 15, characterized in that the length and the structure of the inflatable tube (60) are designed to mechanically decouple the pyrotechnic generator (50) and the punch (30) so as to avoid any
- 35 transmission of vibration from the pyrotechnic generator (50) to the punch (30).
17. The device as claimed in one of claims 2 to 16, characterized in that the operating means (40)

comprise a pyrotechnic generator (50) which has an electric initiator (56).

18. The device as claimed in one of claims 2 to 14,  
5 characterized in that the operating means (40) comprises a pyrotechnic generator (50) which has a charge (54) capable of generating a gas by combustion.

10 19. The device as claimed in claim 5, characterized in that the inflatable sealed member (60) is formed of a stainless steel tube.

15 20. The device as claimed in either of claims 5 and 19, characterized in that the inflatable sealed member (60) has a diameter of the order of 4 mm.

20 21. The device as claimed in one of claims 2 to 20, characterized in that the stressing means comprise a punch and retaining means (20) formed of an anvil and located one on each side of the structure to be ruptured (10).

25 22. The device as claimed in claim 21, characterized in that the anvil (20) is made of a material not as hard as the punch (30).

30 23. The device as claimed in either of claims 21 and 22, characterized in that the anvil (20) is made of medium-carbon steel.

35 24. The device as claimed in either of claims 21 and 22, characterized in that the anvil (20) is made based on elastomer or on a material exhibiting plastic behavior, such as aluminum, copper or lead.

25. The device as claimed in either of claims 21 to 23, characterized in that the anvil (20) has a groove or hollow facing the punch (30).
- 5 26. The device as claimed in one of claims 2 to 25 taken in combination with claim 3, characterized in that the retaining means (20) comprise two supports (22, 24) situated on the opposite side of the fibers (10) to the punch (30), the two  
10 supports (22, 24) being arranged one on each side of the edge (33) of the punch (30) in the longitudinal direction of the fibers (10).
- 15 27. The device as claimed in claim 28, characterized in that the distance separating the two supports (22, 24) is between one times, preferably two times, the diameter or thickness of the fibers (10) and the amplitude of relative displacement of the stressing means (20, 30).
- 20 28. The device as claimed in one of claims 2 to 27, characterized in that the stressing means (20, 30) are formed of two comb-shaped structures arranged one on each side of the fibers (10).
- 25 29. The device as claimed in one of claims 2 to 28, characterized in that it further comprises means (37, 38) designed to keep the stressing means, such as a punch (30), away from the structure to  
30 be ruptured (10) before the pyrotechnic generator (50) is operated.
- 35 30. The device as claimed in claim 29, characterized in that the temporary keeping means consist of silicone-elastomer strips (37, 38).
31. The device as claimed in one of claims 2 to 30, characterized in that the pyrotechnic generator

(50) is designed to emit at least 1.5 l of gas at one atmosphere.

5 32. The device as claimed in one of claims 1 to 31, characterized in that the element (150) working in compression is built in at one end into an element of complementary structure (100).

10 33. The device as claimed in one of claims 1 to 32, characterized in that it has an annular structure.

15 34. The device as claimed in claim 33, characterized in that the structure to be ruptured (10) is formed of a continuous annulus.

20 35. The device as claimed in claim 33, characterized in that the structure to be ruptured (10) is formed of several elements distributed about the axis O-O of the structure.

25 36. The device as claimed in one of claims 1 to 35, characterized in that the element (150) working in compression is formed integrally with one of the two support elements (100, 110).

30 37. The device as claimed in one of claims 1 to 36 taken in combination with claim 3, characterized in that the element (150) working in compression also serves as retaining means (20).

35 38. The device as claimed in one of claims 1 to 36 taken in combination with claim 3, characterized in that the element (150) working in compression also serves as a guide for the punch (30) and, as appropriate, for an inflatable tube (60) belonging to the operating means.

39. The device as claimed in one of claims 2 to 38, characterized in that the structure to be ruptured



(10) is formed of a piece of composite material equipped with an additional thickness (12, 14) at least at one of its ends.

- 5 40. The device as claimed in one of claims 2 to 39, characterized in that the structure to be ruptured (10) can be split into several strands.
- 10 41. The device as claimed in one of claims 2 to 40, characterized in that the structure to be ruptured (10) is formed of a tubular structure.
- 15 42. The device as claimed in one of claims 2 to 41, characterized in that it comprises an ogee shape (20, 70) placed between various strands of the structure to be ruptured (10).
- 20 43. The device as claimed in claim 42, characterized in that the ogee shape (70) carries at least one punch (30).
- 25 44. The device as claimed in claim 42, characterized in that the ogee shape (20) serves as retaining means.
- 30 45. The device as claimed in one of claims 42 to 44, characterized in that the ogee shape (70) carries a pyrotechnic generator (50).
- 35 46. The device as claimed in one of claims 42 to 45, characterized in that the ogee shape carries several punches (30).
47. The device as claimed in one of claims 2 to 46, characterized in that it comprises two punches (30) associated with respective pyrotechnic generators (50) facing each zone to be severed of the structure to be ruptured (10).

48. The device as claimed in one of claims 2 to 47, characterized in that it comprises at least two redundant rupture devices (20, 30, 40, 50) placed in parallel.

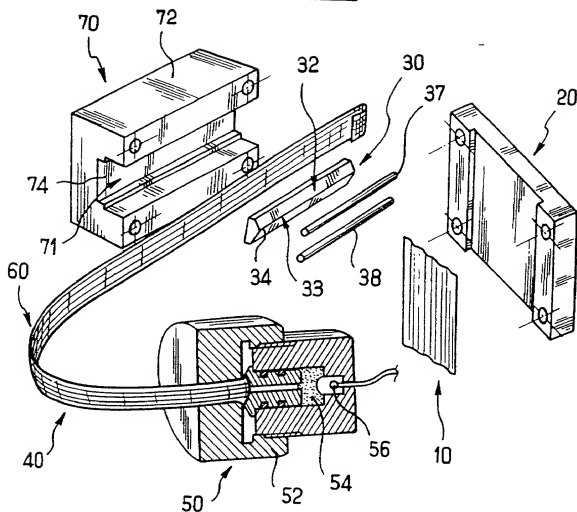
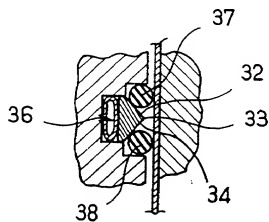
5

49. The device as claimed in one of claims 2 to 48, characterized in that at least certain elements (20, 30, 40, 50) of the rupture device are duplicated to guarantee the reliability of the assembly.

10

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193

1 / 5

FIG. 1FIG. 2

2 / 5

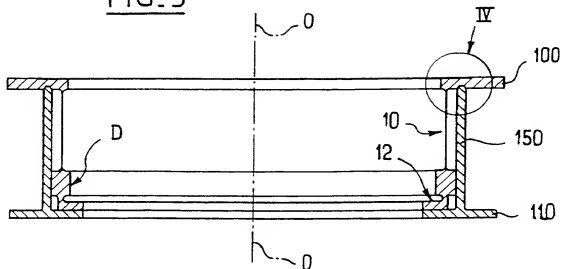



FIG. 3FIG. 4FIG. 5FIG. 6

FIG. 7




FIG. 8




FIG. 9


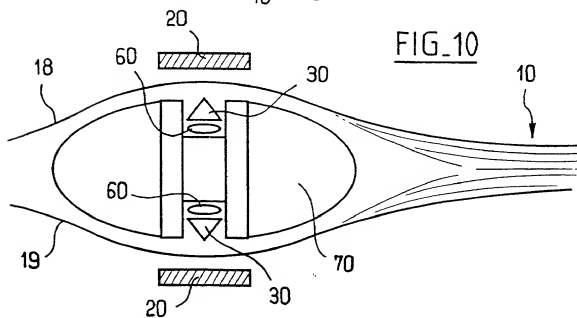


FIG. 10



4 / 5

FIG. 11

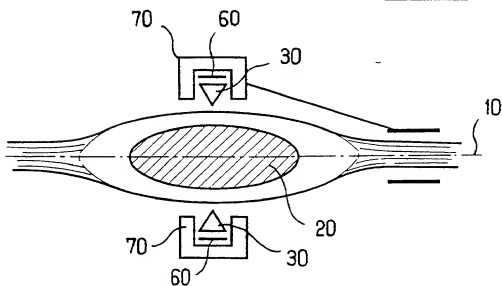


FIG. 12

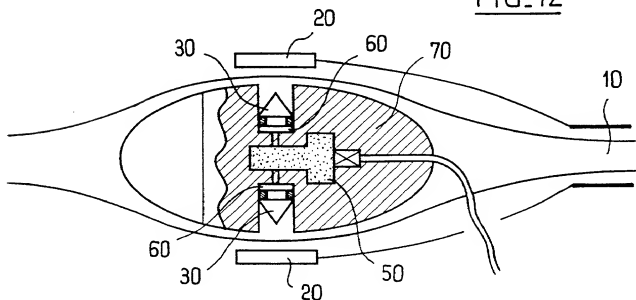


FIG. 13

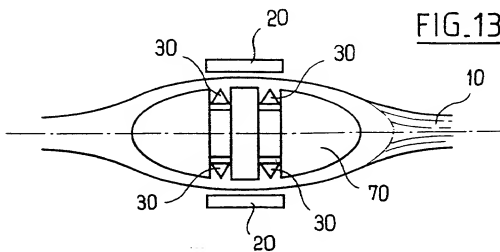
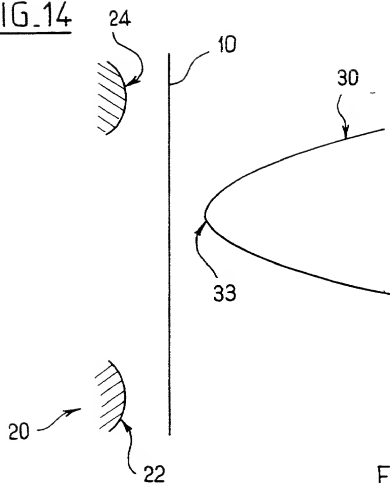

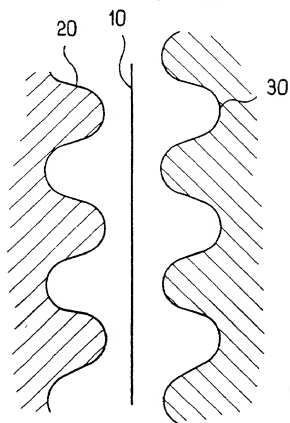


FIG. 14FIG. 15FIG. 16



Our ref.: 15675. P369

## DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**CONTROLLED RUPTURE DEVICE FOR A STRUCTURE OPERATING IN TRACTION AND EQUIPMENT USING SAME**

the specification of which

is attached hereto  
was filed on February, 18, 2000 as  
Application Serial No. PCI/FR00/00413  
And was amended on  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I do not know and do not believe that the same was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 199, of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

### Prior Foreign Application(s)

### Priority Claimed

FR99/02087 (Number)	FRANCE (Country)	19 February 1999 (Day/Month/Year Filed)	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.



PCT/FR00/00413  
(Application Serial No.)

18 February 2000  
(Filing Date)

Pending  
(Status - patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status - patented, pending, abandoned)

(Application Serial No.)

(Filing Date)


(Status - patented, pending, abandoned)

I hereby appoint BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN, a firm including :

Keith G. Askoff, Reg. No. 33,828; Aloysius T.C. AuYeung, Reg. No. 35,432; Bradley J. Berezna, Reg. No. 33,474; Michael A. Bernadacou, Reg. No. 35,934; Roger W. Blakely, Jr., Reg. No. 25,831; Timothy R. Croll, Reg. No. 36,771; Daniel M. De Vos, Reg. No. 37,813; Scott A. Griffin, Reg. No. 38,167; Stephen D. Gross, Reg. No. 31,020; David R. Halvorson, Reg. No. 33,395; Michael D. Hartogs, Reg. No. 36,547; Brian D. Hickman, Reg. No. 35,894; George W. Hoover II, Reg. No. 32,992; Paul H. Hostmann, Reg. No. 36,167; Eric S. Hyman, Reg. No. 30,139; Dag H. Johansen, Reg. No. 36,172; Stephen L. King, Reg. No. 19,180; Joseph T. Lin, Reg. No. 38,225; Michael J. Mallie, Reg. No. 36,591; James D. McFarland, Reg. No. 32,544; Anthony C. Murabito, Reg. No. 35,295; Kimberley G. Nobles, Reg. No. 38,255; Ronald W. Reagin, Reg. No. 20,340; Kent R. Richardson, Reg. No. P-39,443; James H. Salter, Reg. No. 35,668; William W. Schaal, Reg. No. P-39,018; James C. Sheller, Reg. No. 31,195; Edward W. Scott IV, Reg. No. 36,000; Maria E. Sobrino, Reg. No. 31,639; Stanley W. Sokoloff, Reg. No. 25,128; Allan T. Sponseller, Reg. No. 38,318; John C. Stattler, Reg. No. 36,285; Edwin H. Taylor, Reg. No. 25,129; Lester J. Vincent, Reg. No. 31,460; Ben J. Yorks, Reg. No. 33,609; and Norman Zafman, Reg. No. 26,250; my attorneys; and William D. Davis, Reg. No. 38,428; Gary B. Goates, Reg. No. 35,159; Soyeon P. Laub, Reg. No. P-39,266; Thomas X. Li, Reg. No. 37,079; and Edwin A. Sloane, Reg. No. 34,728; my patent agents, with offices located at 12400 Wilshire Boulevard, 7th Floor, Los Angeles, California 90025, telephone (310) 207-3800, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: VALEMBOSIS Guy

Inventor's Signature: 


Date: **10 SEP. 2001**

Residence: Blagnac / FRANCE  
(City, State) FRX

Citizenship: FR  
(Country)

Post Office Address: 20, rue de Sologne - 31700 BLAGNAC / FRANCE

Full Name of Second/Joint Inventor: GENDRE Pascal

Inventor's Signature: 

Date: **10 SEP. 2001**

Residence: TOULOUSE / FRANCE  
(City, State) FRX

Citizenship: FR  
(Country)

Post Office Address: 56, rue Raspail - 31400 TOULOUSE / FRANCE

3-00

~~PROT. ALLEY RW~~

10 SEP. 2001

FRX

{Country}

Post Office Address: 2, rue de la Garonne – 31120 ROQUETTES / FRANCE

[illegible]